

AXIS Camera Companion

Surveillance made simple.



- > High-definition identification
- > Easy to install and use
- > No central PC or DVR needed
- > Secure remote access to video
- > Apps for iPhone, iPad and Android
- > Scalable and future-proof

AXIS Camera Companion is the market's easiest video surveillance solution for small systems typically 1-4 cameras and with support up to 16 cameras. With AXIS Camera Companion, all video is recorded on SD cards in the cameras, and no DVR or server is necessary - making each camera a smart, independent video recording device. The system consists of standard Axis cameras, SD cards, software clients for PC and smartphones, and standard network equipment.

AXIS Camera Companion offers HDTV quality for reliable identification of people and incidents. Video clips or snapshots can be easily exported. Secure, remote access is easy to set up, and with support for apps for iPhone, iPad and Android, AXIS Camera Companion lets the user view video at any time, from anywhere.

AXIS Camera Companion removes the single point of failure which is common in alternative solutions where a DVR failure prevents all cameras from being recorded. The cameras in an AXIS Camera Companion system record video regardless of the network status.

The free PC client is only needed during installation. For viewing live or recorded video, or exporting video after an incident, either the client or a smartphone app can be used.

AXIS Camera Companion is a scalable and future-proof network video solution that protects the customer's investment. Adding new cameras to the system is easy, and existing analog cameras can be integrated using Axis video encoders.



Mobile viewing apps for iOS and Android



Technical Specifications — AXIS Camera Companion

General	
Languages	English, UK English, Arabic, Brazilian Portuguese, Czech, Dutch, Finnish, French, German, Italian, Japanese, Korean, Polish, Russian, Simplified Chinese, Traditional Chinese, Spanish, Swedish and Turkish
Number of channels	1 to 16 cameras per site
Compatible products	Axis network cameras and encoders with firmware 5.40 or later
Video	
Video compression	H.264 (MPEG-4 Part 10/AVC)
Resolutions	Supports all camera resolutions
Frame rates	Supports all camera frame rates
Audio	One-way audio streaming, AAC audio compression
Storage	
Storage Media	AXIS Surveillance microSDXC Card 64 GB Storage option: Network-Attached Storage (NAS)
Storage capacity	Configurable retention recording, duration can be limited per camera to conform to local legal requirements
Live view	
Camera live view	Live view of up to 16 cameras 1, 4, 9 and 16-split views and full screen, Panoramic view, Multiview streaming, Axis' Corridor Format, Camera sequence, Digital zoom
PTZ	Control of PTZ and dome cameras using mouse or joystick

Playback	
Search for recordings	Search for recordings based on camera, Date and time Timeline visualization
Playback	Playback speed: up to 8x or frame by frame
Export	
	Single images in JPEG or video sequences in ASF, Installation-free standalone player included, Digital signature on exported recordings
Recording control	
Motion detection	Advanced camera-based motion detection for low bandwidth utilization
Continuous and scheduled	Schedule per camera allows continuous recording or customization of weekday and weekend recordings
System	
PC Client	Download from: www.axis.com/companion
System recommendations	OS: Windows 8 64-bit CPU: Intel Core i5 RAM: 4 GB Graphics card: 256 MB onboard video memory Network: 100 Mops Uninterruptible Power Supply (UPS)
Mobile access	Axis mobile viewing apps for Android devices, iPhone and iPad
Mobile device minimum requirements	Android 4.1 iOS 7
Required equipment	Power over Ethernet switch, Ethernet cables, PC, SD cards and/or NAS. For remote and/or wireless access a router is also required
Security	Multiple user access levels with password protection


System setup example



PC Client: Recording view



Mobile App: Site view

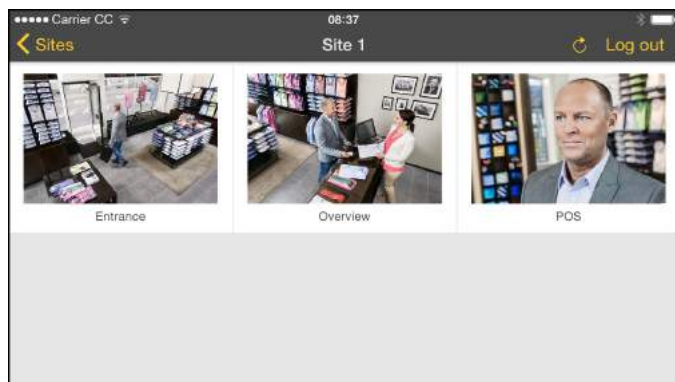

Mobile App: Recording view

